


Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

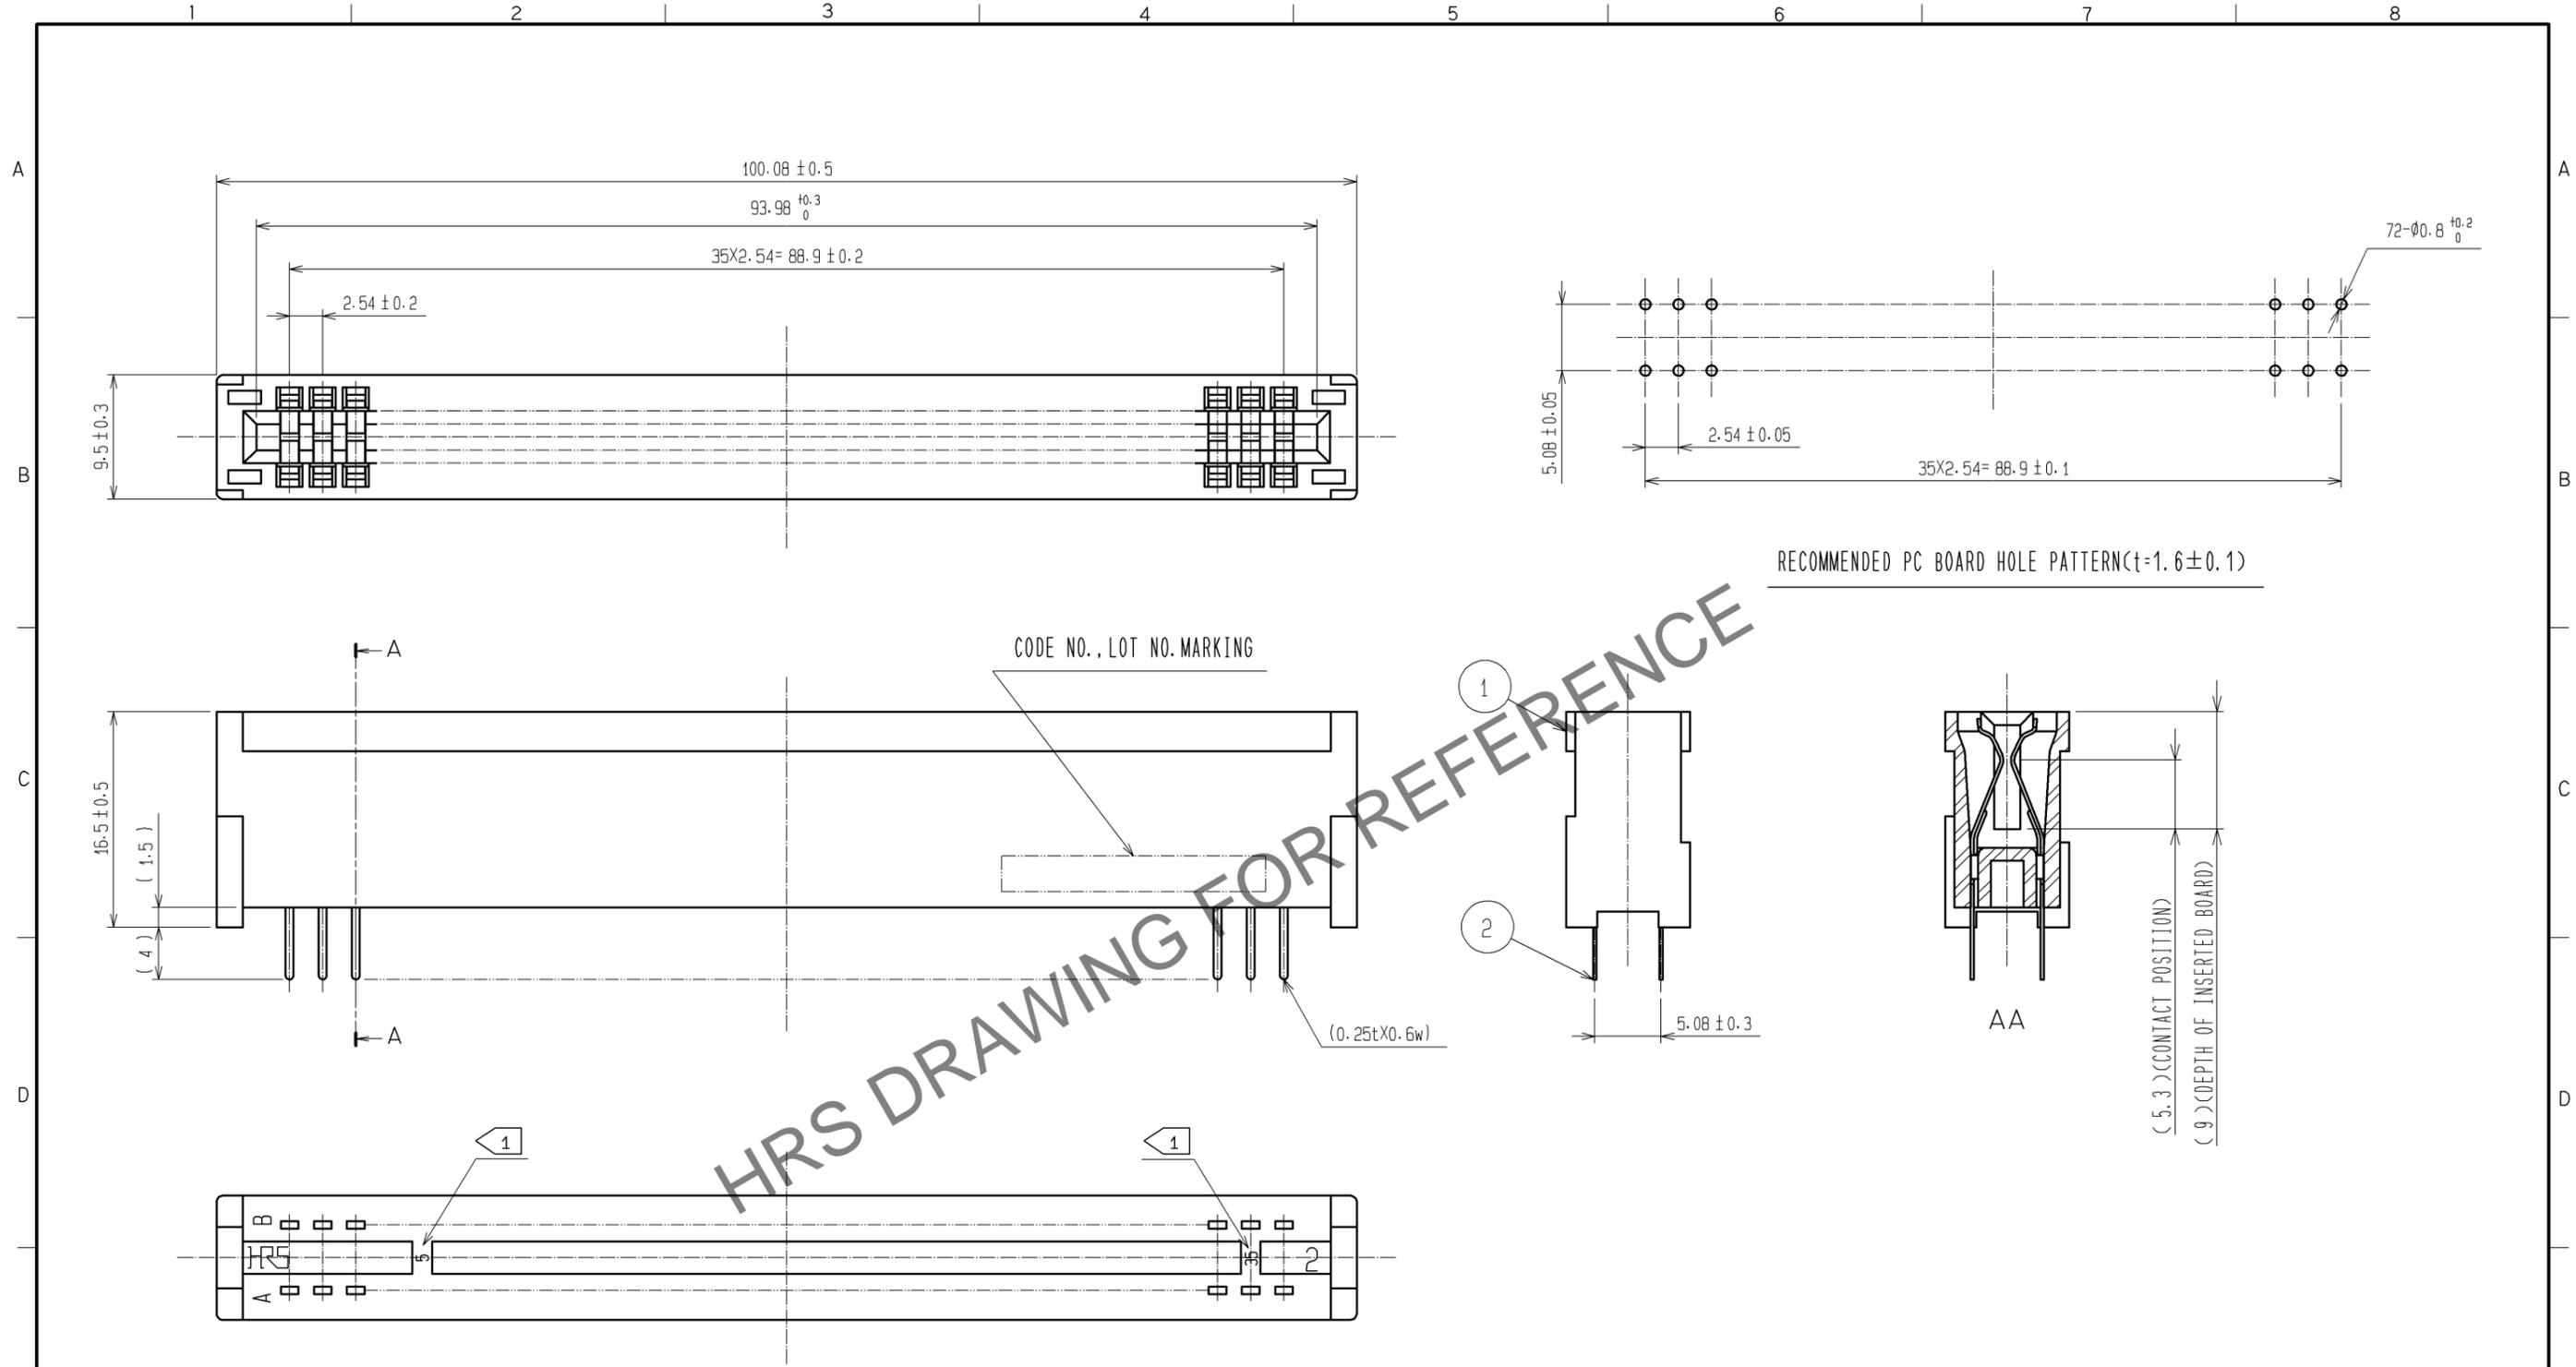

NOTE 1 CONTACT NO. (5, 10, 15, 20, 25, 30, 35)
2 A POLARIZING KEY INSERTED BETWEEN THE FOLLOWING CONTACT POSITIONS.
 (5 TO 6), (10 TO 11), (15 TO 16), (20 TO 21), (25 TO 26), (30 TO 31), (35 TO 36)

1	PBT	BLACK UL94V-0	2	PHOSPHOR BRONZE	CONTACT AREA : Ni2.5 μ m+Au0.05 μ m DIP AREA : Ni2.5 μ m+Sn2 μ m		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE FREE	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	11.10.28	DRAWING NO. EDC3-017844-01			
		CHECKED : NH. SUGITA	11.10.28	PART NO. CR22A-72D-2.54DS(70)			
		DESIGNED : KJ. NISHIWAKI	11.10.28	CODE NO. CL522-0020-6-70			
		DRAWN : CR. TAKESHIMA	11.10.28			1/1	