


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

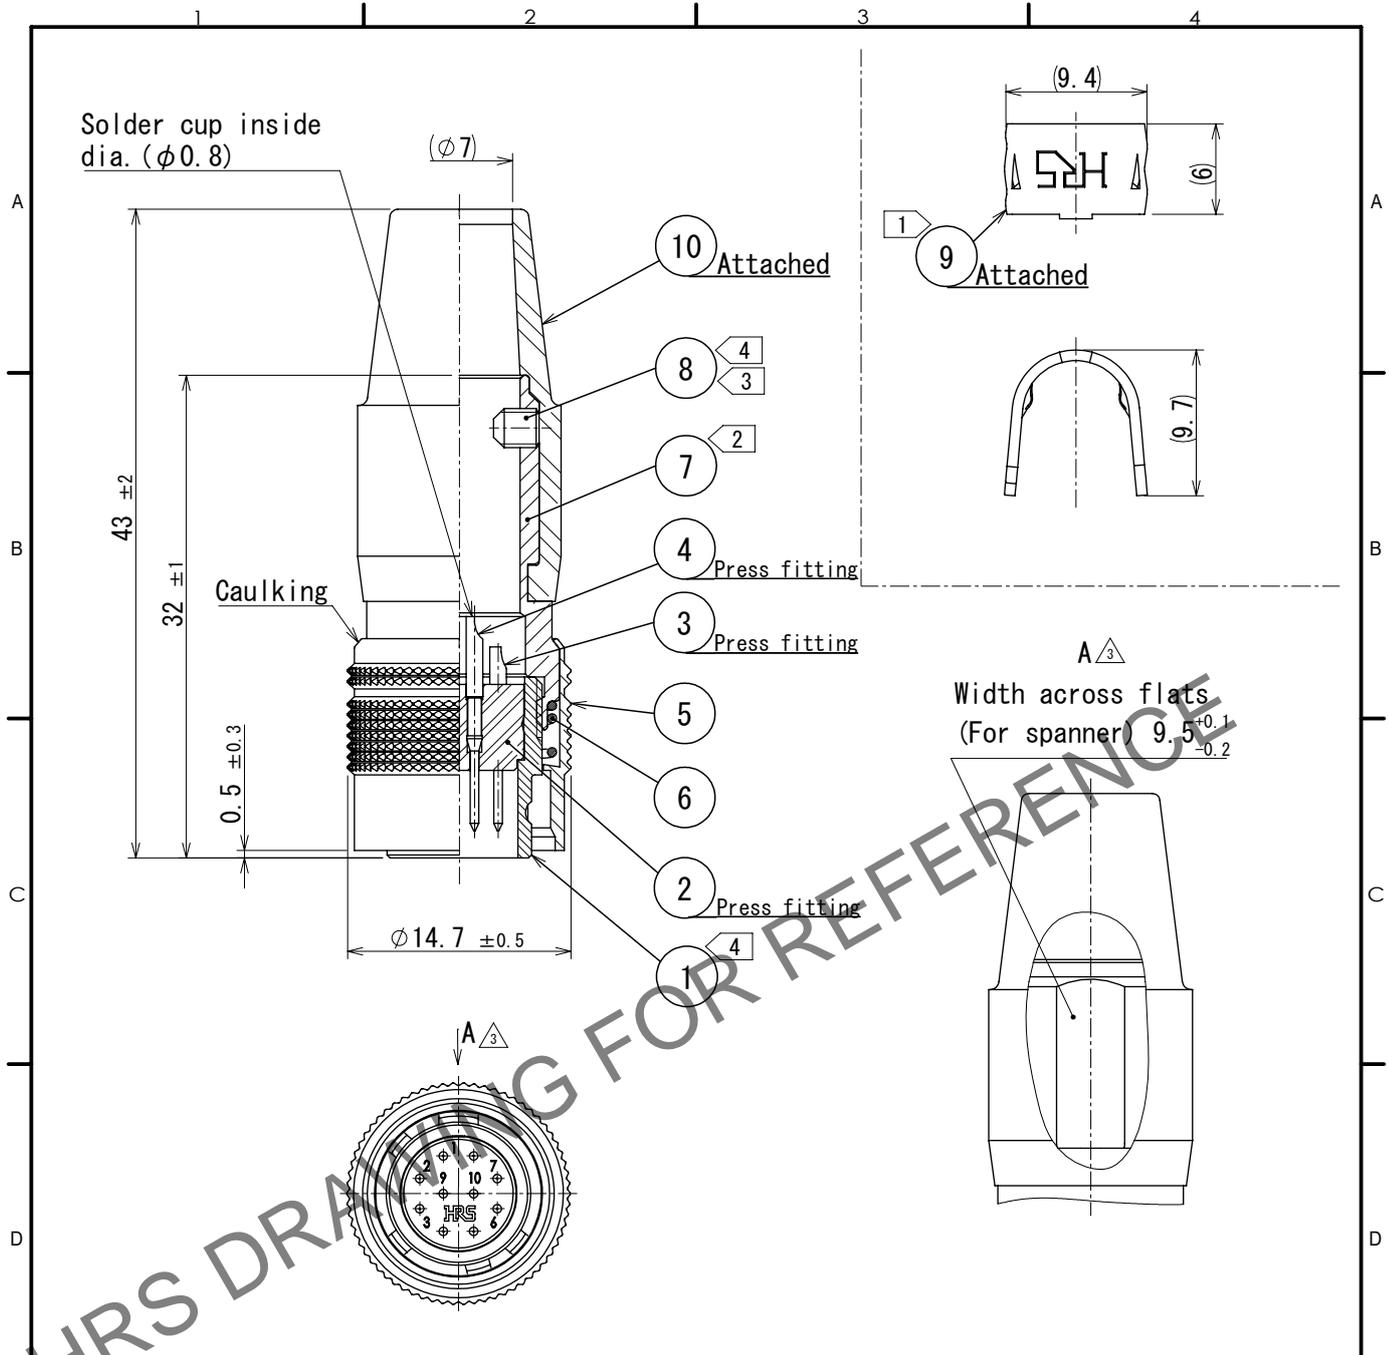

- Notes
- ① Hand crimping tool. Ref. No. ⑨ : HR10A-TC-02 (CL150-0041-2)  
The hole diameter for crimping :  $\phi 7.0$
  - ② The recommended clamp torque, Ref. No. ⑦ : 2 to 2.5 N · m.
  - ③ Across flats hexagon head of Ref. No. ⑧ : 1.27  
The recommended clamp torque, Ref. No. ⑧ : 0.3 to 0.4N · m.
  - ④ Loctite 263, Henkel Japan or equivalent applies to prevent Ref. No. ① and ⑧ from loosening.
  - 5 One example of the rotation of Ref. No. ⑦ to Ref. No. ① is shown.
  - 6 The assembly this product applies to the manual ETAD-C0354-00.

△ CAD change

5	Brass	Matte finish nickel plated	10	Chloroprene rubber	(Black)		
4	Brass	Silver plating 2 $\mu$ m min.	9	Brass			
3	Brass	Silver plating 2 $\mu$ m min.	8	Steel	Nickel plating Hexagon socket set Screw M2.6×0.45×3		
2	Polyamide	(Black) UL94V-0	7	Brass	Nickel plating		
1	Zinc alloy	Matte finish nickel plated	6	Steel	Nickel plating		
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS

		SCALE 2:1	COUNT 3	DESCRIPTION OF REVISIONS DIS-C-00020284	DESIGNED TY. SUZUKI	CHECKED HY. KOBAYASHI	DATE 2025. 07. 07
	HIROSE ELECTRIC CO., LTD.	CHECKED : E.J. KUNII 2005. 10. 20	PART NO. HR10A-10P-10P (73)				
		DESIGNED : DS. MATSUNE 2005. 10. 19					
		DRAWN : DS. MATSUNE 2005. 10. 19		CODE NO. CL0110-0407-3-73			