


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved. In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

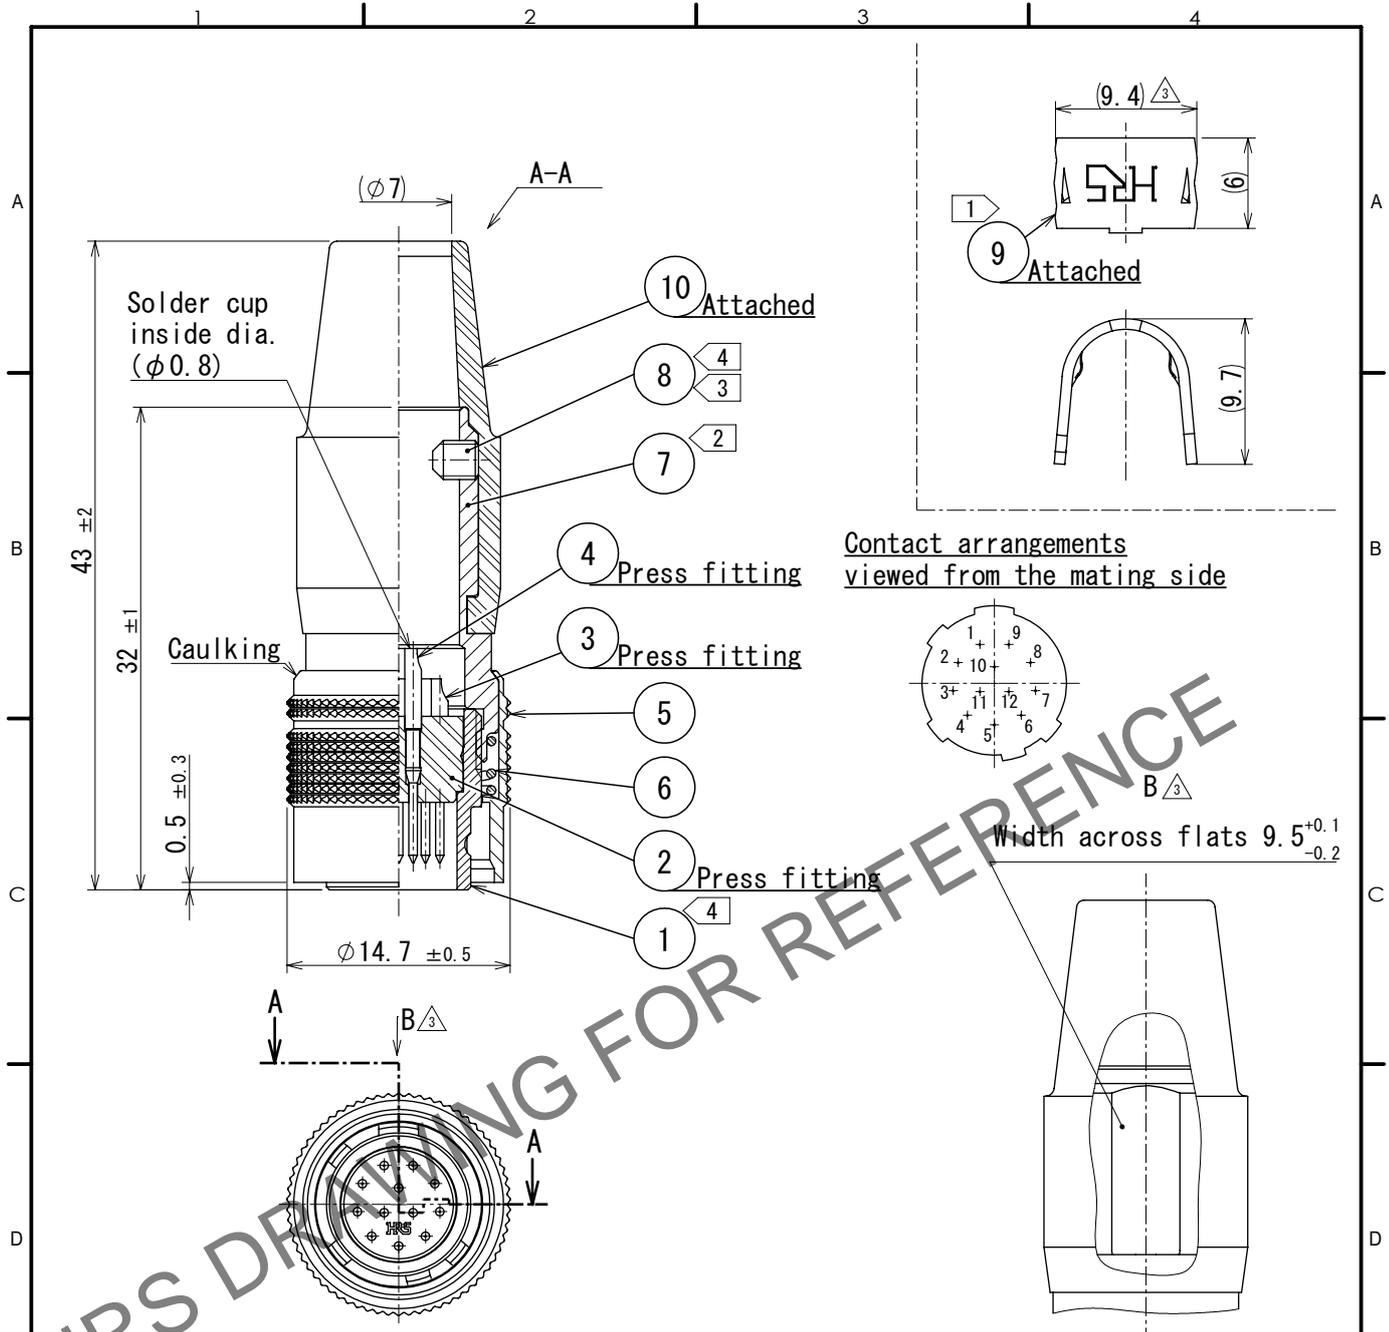

- Notes
- ① Hand crimping tool, Ref.No. ⑨: HR10A-TC-02, apply to $\phi 7$.
 - ② The recommended clamp torque, Ref.No. ⑦ : 2 to 2.5 N·m.
 - ③ Across flats hexagon head of Ref.No. ⑧ : 1.27
The recommended clamp torque, Ref.No. ⑧ : 0.3 to 0.4 N·m.
 - ④ Loctite 263, Henkel Japan or equivalent applies to prevent Ref.No. ① and ⑧ for loosening.
 - 5 One example of the rotation of Ref.No. ⑦ to Ref.No. ① is shown.
 - 6 The assembly this product applies to the manual ETAD-C0354-00.

△ CAD change

| NO. | MATERIAL | FINISH | REMARKS | NO. | MATERIAL | FINISH | REMARKS |
|-----|------------|-----------------------------|---------|-----|--------------------|----------------|--|
| 5 | Brass | Matte finish nickel plating | | 10 | Chloroprene rubber | (Black) | |
| 4 | Brass | Silver plating 2μm min. | | 9 | Brass | | |
| 3 | Brass | Silver plating 2μm min. | | 8 | Steel | Nickel plating | JIS B 1177, Hexagon socket set screw M2.6×0.45×3 |
| 2 | Polyamide | (Black) UL94V-0 | | 7 | Brass | Nickel plating | |
| 1 | Zinc alloy | Matte finish nickel plating | | 6 | Steel | Nickel plating | |

| | | | | | | | | |
|--|--|--|--|---|--|------------------------|--------------------------|----------------------|
| | UNITS mm | | SCALE 2:1 | COUNT 4 | DESCRIPTION OF REVISIONS DIS-C-00019773 | DESIGNED TY. SUZUKI | CHECKED HY. KOBAYASHI | DATE 2025. 04. 25 |
| | APPROVED : MR. YOSHIDA CHECKED : MO. SATOH DESIGNED : YH. YAMADA DRAWN : YH. YAMADA | | 2005. 01. 05 2005. 01. 05 2005. 01. 05 2005. 01. 05 | DRAWING NO. EDC-010386-73-73 PART NO. HR10A-10P-12P (73) CODE NO. CL0110-0401-7-73 | | | | |