


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

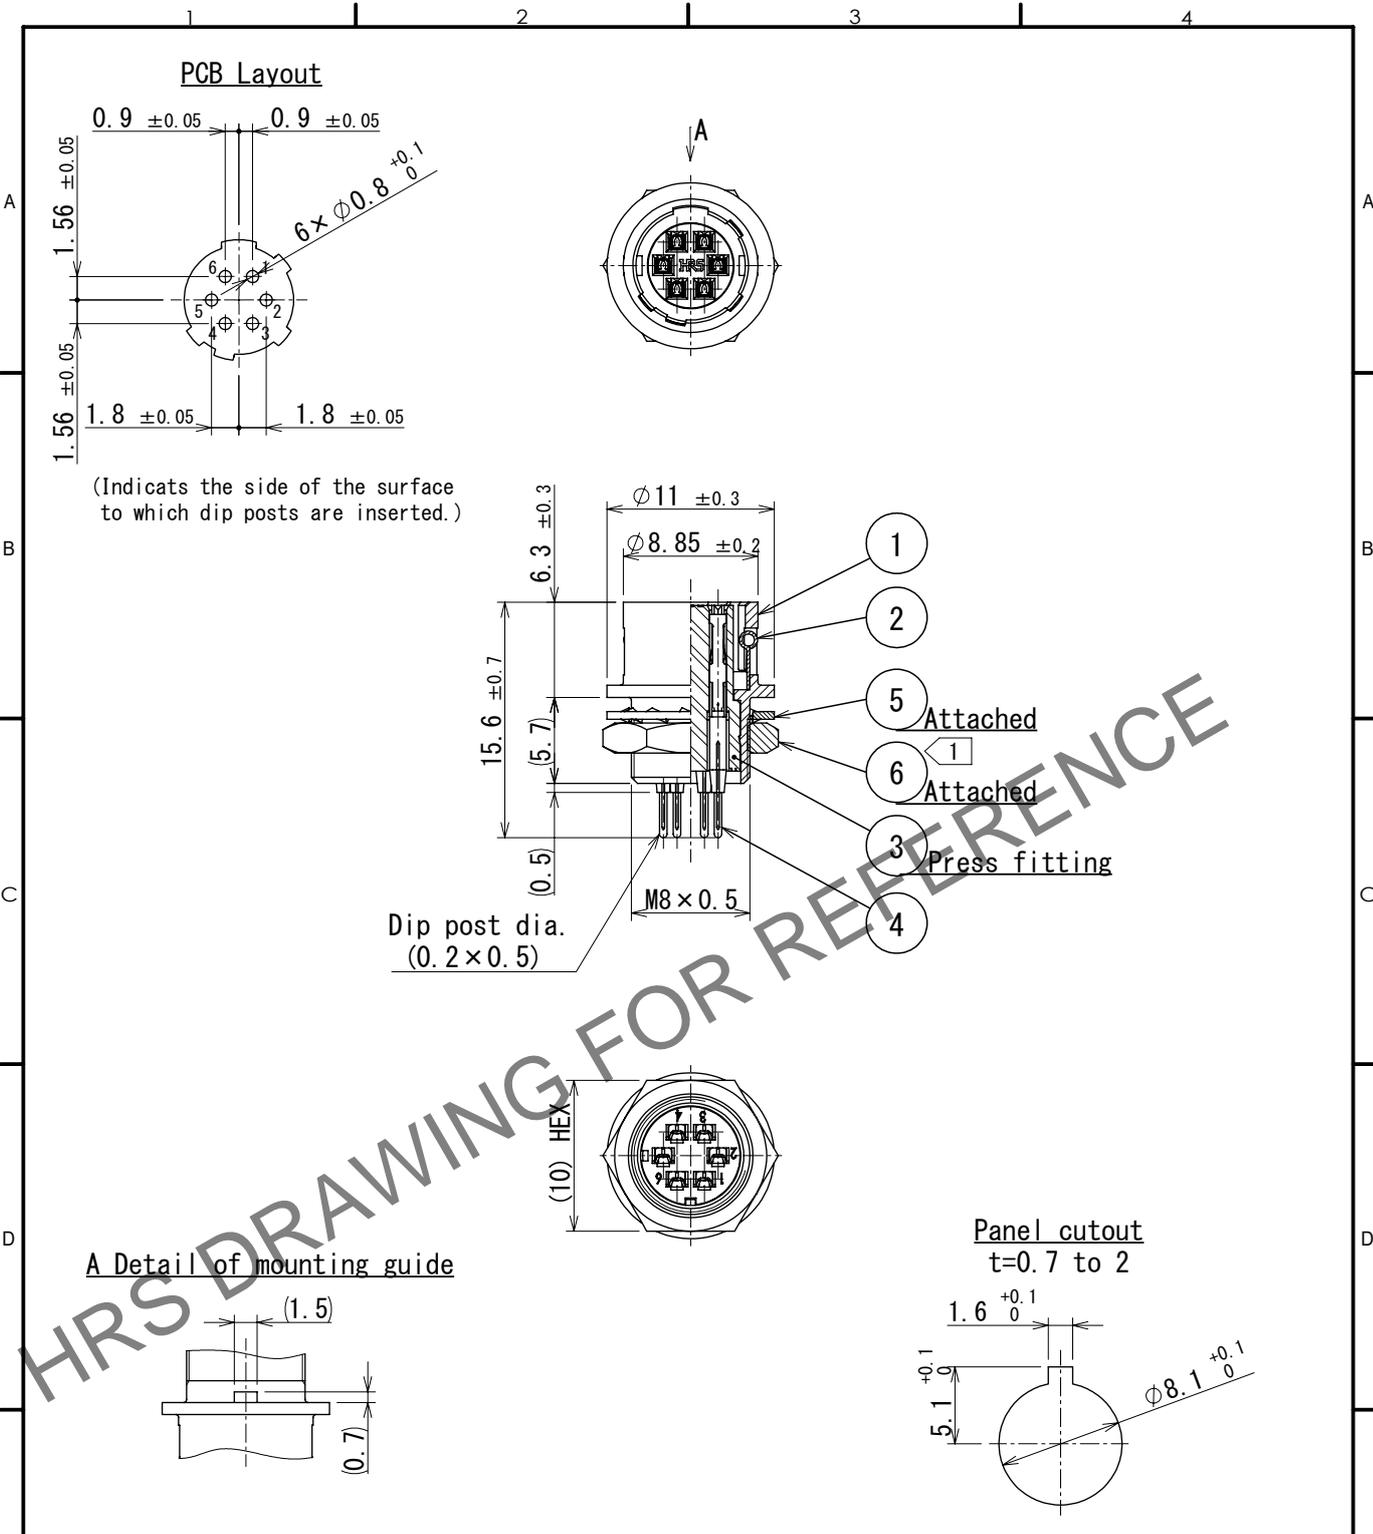

△ Note ① The recommended clamp torque, Ref.No. ⑥ : 1.5 N · m.
 Loctite 243, Henkel Japan or equivalent apply to prevent Ref.No. ⑥ for loosening.

△ CAD change

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
3	Polybutylene terephthalate	(Black) UL94V-0		6	Brass	Nickel plating	
2	Stainless steel			5	Phosphor bronze	Nickel plating	
1	Zinc alloy	Matte finish nickel plated		4	Phosphor bronze	Silver plating 2μm min.	

UNITS mm		SCALE 2:1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
			△ 2	DIS-C-00019520	HY. KISHI	HY. KOBAYASHI	2025. 03. 19

HRS HIROSE ELECTRIC CO., LTD.	APPROVED : MO. SATOH	2007. 03. 08	DRAWING NO.	EDC-022529-73-73
	CHECKED : EJ. KUNII	2007. 03. 08	PART NO.	HR10A-7R-6SB (73)
	DESIGNED : TO. HORII	2007. 03. 08	CODE NO.	CL0110-0316-0-73
	DRAWN : MK. SATO	2007. 03. 08		