

Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

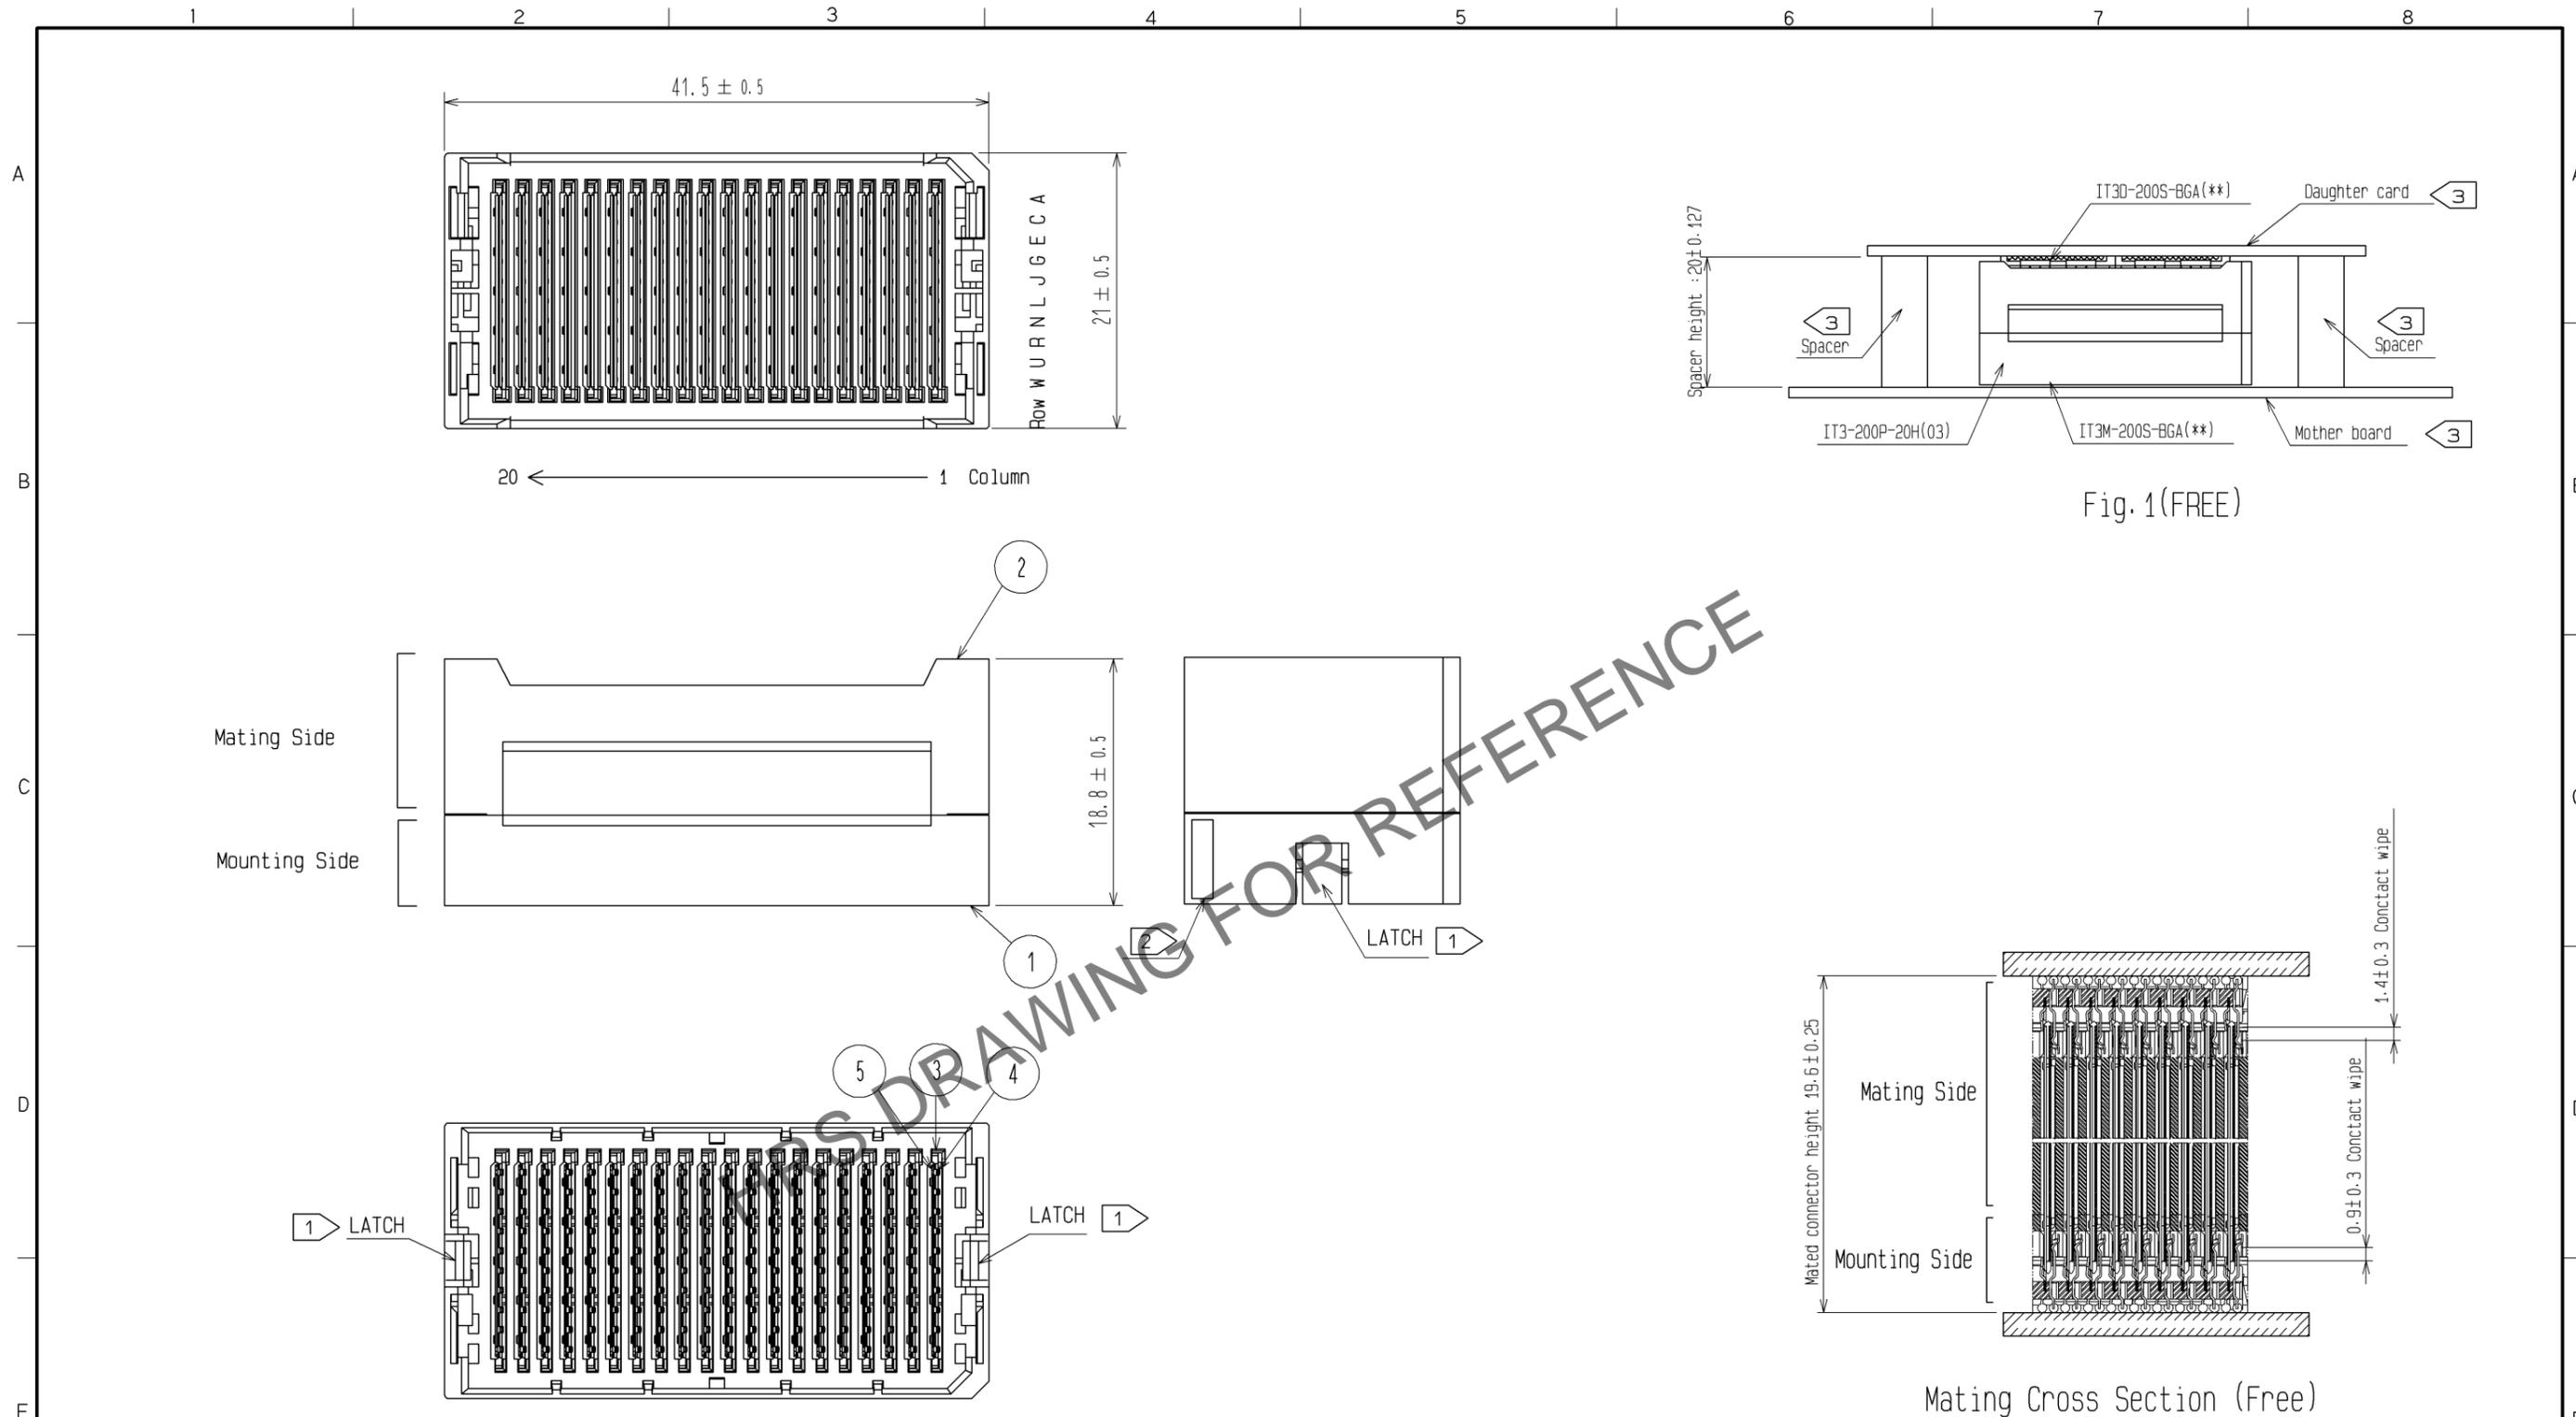


Fig. 1(FREE)

Mating Cross Section (Free)

- NOTE.
- ① Mounting side is mated with the receptacle:IT3M-200S-BGA(**) and fixed with the latch.
 - ② Lot No. shall be marked on the indicated position.
 - ③ The indicated mother board and daughter card shall be fastened to the additional reinforcements to prevent the stress on IT3*-200S-BGA(**) solder joints.
 - 4. More information of this product is available in HIROSE document :ETAD-F0347 "IT3 design guideline".
 - 5. This product consists of 200 signal lines and 180 ground lines.
 - 6. 40pcs of this products are packed in a soft tray.
 - 7. Standard package of 80pcs are packaged in a carton box.

3	LCP	BLACK	UL94V-0					
2	PBT	GRAY	UL94V-0	5	Copper Alloy	CONTACT AREA:NICKEL(1.5µm)+GOLD(0.75µm)		
1	PBT	BLACK	UL94V-0	4	Copper Alloy	CONTACT AREA:NICKEL(1.5µm)+GOLD(0.75µm)		
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS	
UNITS	mm	SCALE	2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED	: TM. MATSUO	09.09.29	DRAWING NO.	EDC3-326462-01		
		CHECKED	: MK. EZAKI	09.09.29	PART NO.	IT3-200P-20H(03)		
		DESIGNED	: TS. SAITO	09.09.26	CODE NO.	CL636-0224-7-03		
		DRAWN	: TS. SAITO	09.09.26				