


Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

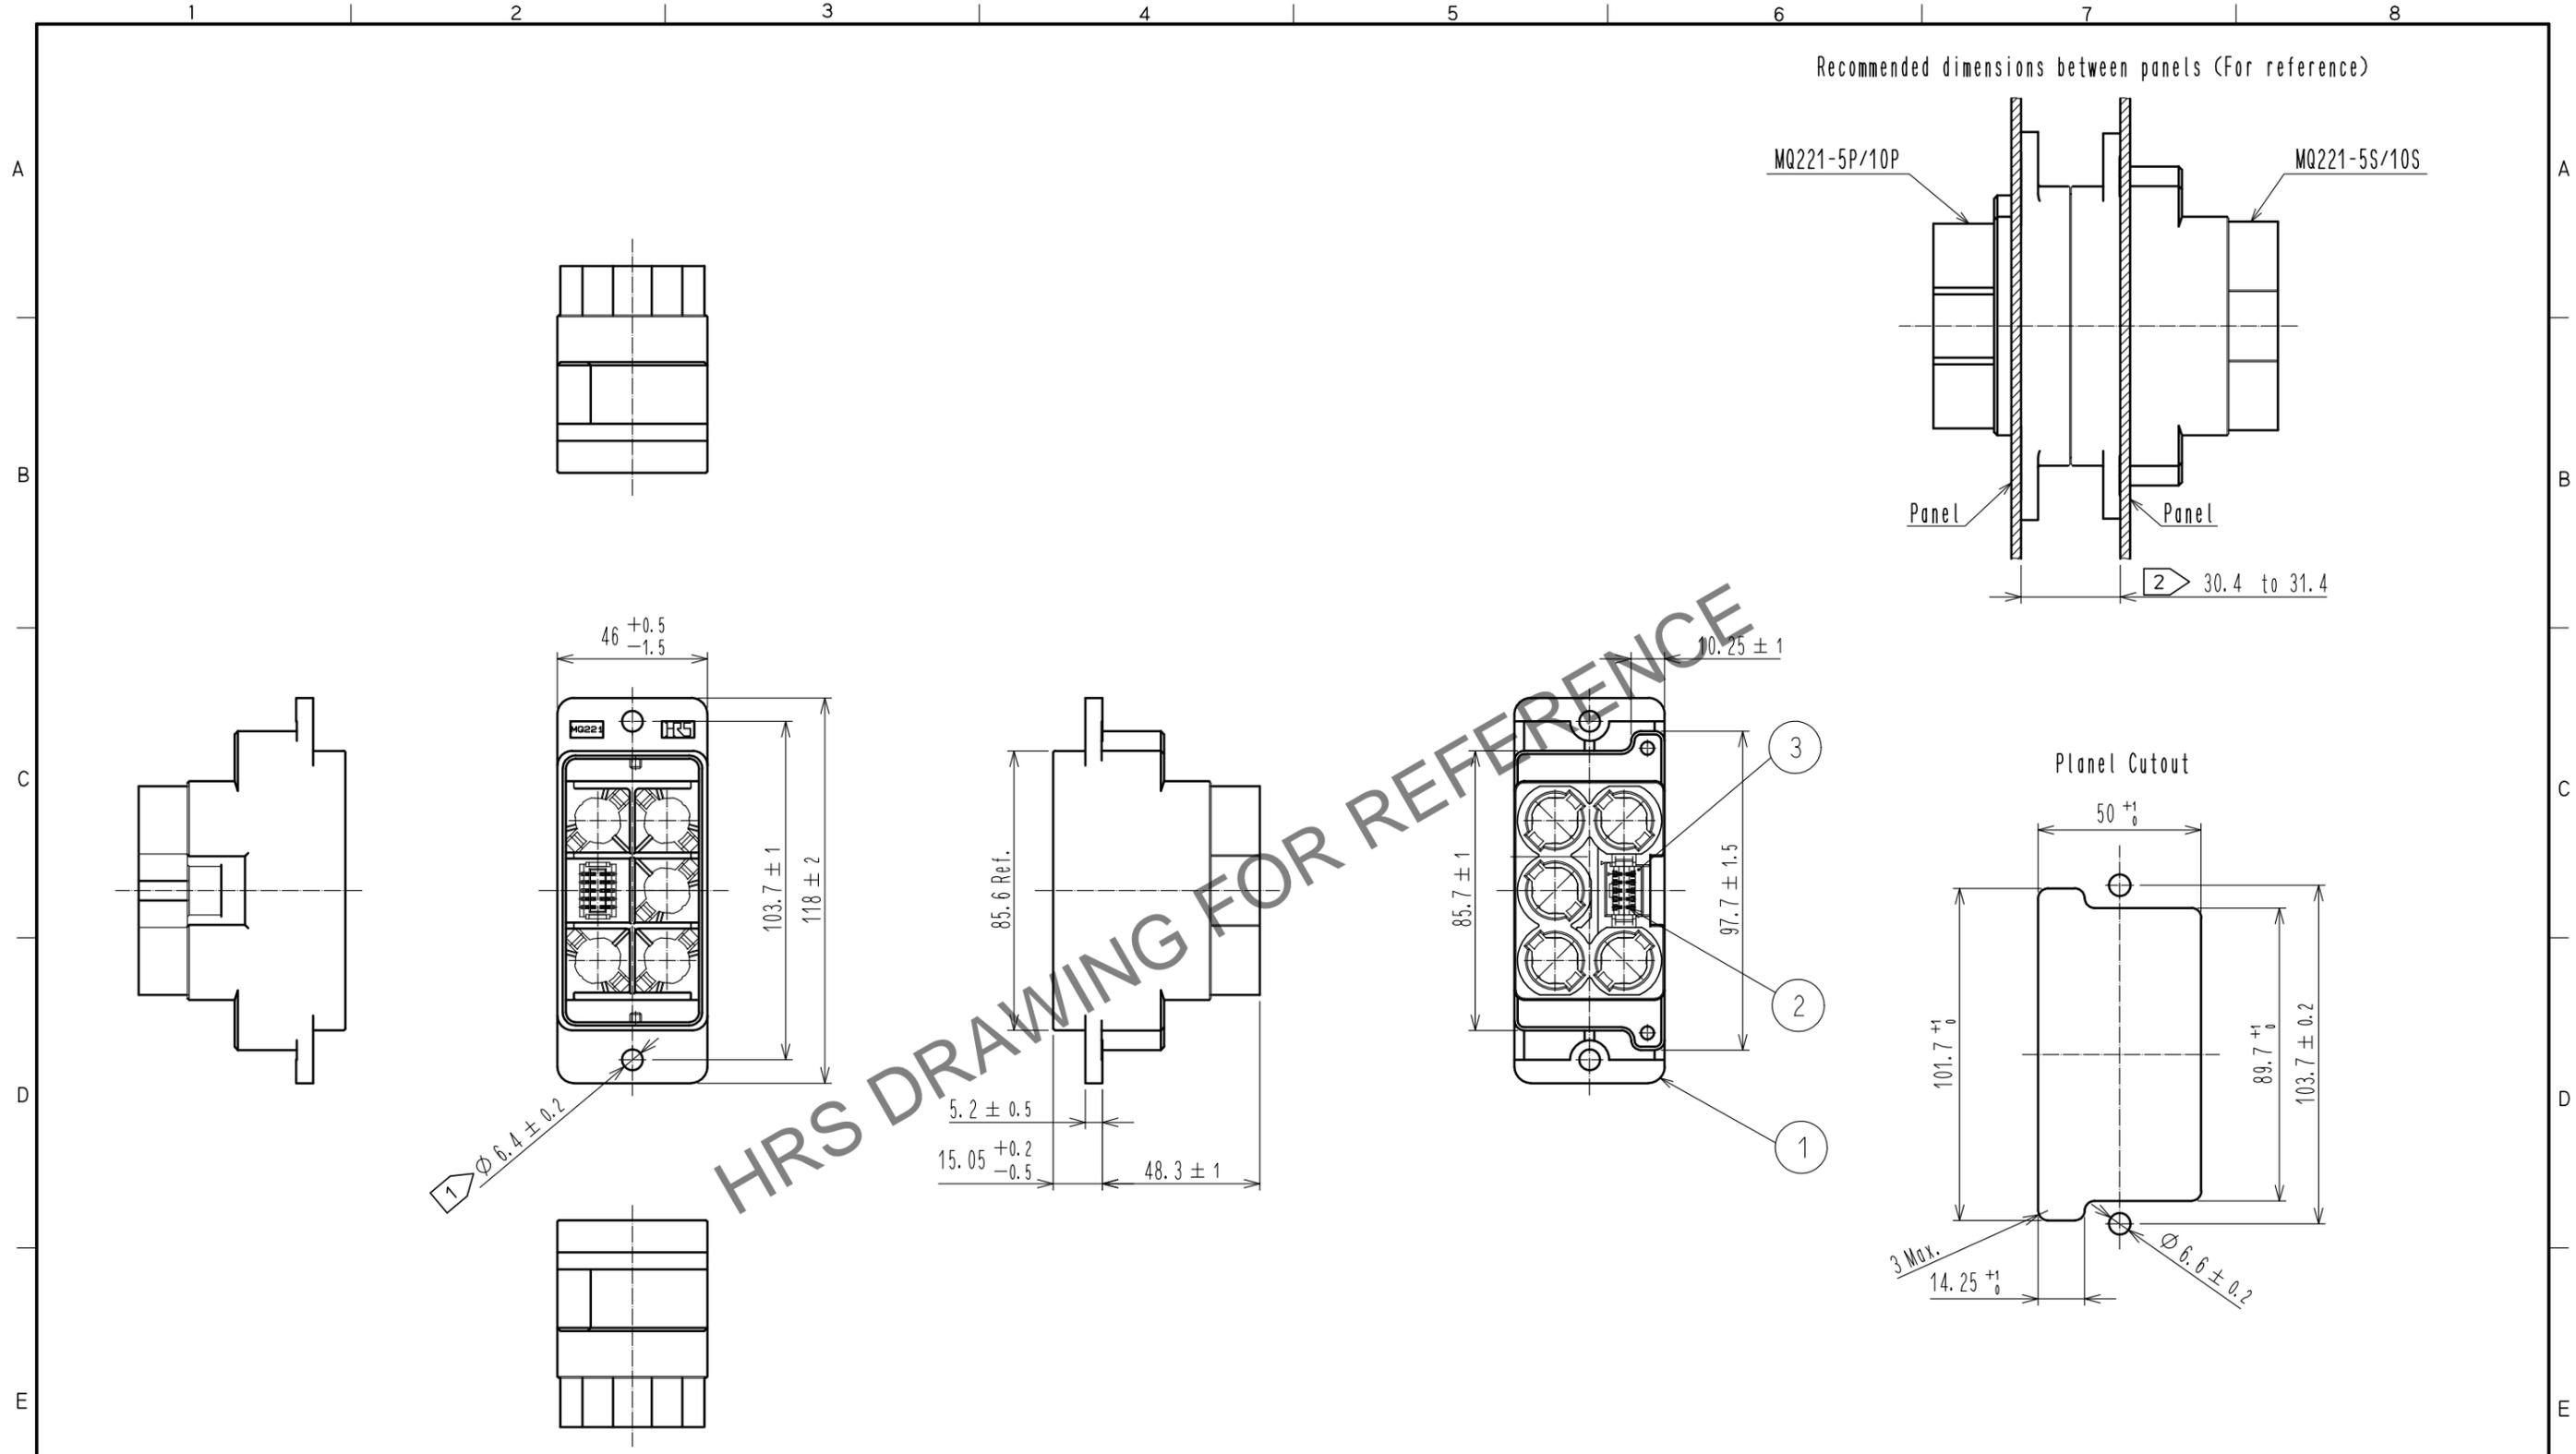

- Note
- ① The screw used for attach the panel is M6. And the recommended tightening torque is 5 N·m.
  - ② The recommended dimensions between panels are from 30.4 to 31.4.
  - ③ This product shall be mated with MQ221-5P/10P(CL0206-2563-0-00) without problem on the performance.
  - ④ Applicable signal contact unit: HIF3BMQ-10D-2.54C(CL0610-0015-0-00)  
 HIF3MAW-10D-2.54R(CL0610-3002-9-00)
  - ⑤ Applicable crimping power contact: EV1-SC2-132(C05) (CL0139-0012-7-05)(38mm<sup>2</sup> contact)  
 EV1-SC2-112(C05) (CL0139-0013-0-05)(22mm<sup>2</sup> contact)  
 EV1-SC2-142(C05) (CL0139-0020-0-05)( 8mm<sup>2</sup> contact)

1	PBT	Black, UL94V-0	3	PBT	Black, UL94V-0
2	Phosphor Bronze	Contact Plating:Gold 0.2µm min. Under Plating:Nickel 0.5µm min.	2	Phosphor Bronze	Contact Plating:Gold 0.2µm min. Under Plating:Nickel 0.5µm min.
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 1 : 2	COUNT 1	DESCRIPTION OF REVISIONS DIS-E-00008194	DESIGNED MO. SHIMOYAMA
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED :RI. TAKAYASU 20171020	DESIGNED MO. SHIMOYAMA	CHECKED KG. OKITA	DATE 20220112
		CHECKED :NM. NISHIMATSU 20171020	DRAWING NO. EDC-129340-00-01		
		DESIGNED :P. EKSOURIYA 20171020	PART NO. MQ221-5S/10S		
		DRAWN :P. EKSOURIYA 20171020	CODE NO. CL0206-2564-0-00		
					①/1