

SAIL-M12BW-12-1.0U**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



Sensor/actuator cables are used for wiring sensors and actuators and for transmitting data or power in various applications. The moulded cable offers connected and tested connection of the plug-in connector to the cable ex-works. The cables may be exposed to a wide range of conditions, such as humidity, dust, heat, cold, shock or vibration.

Our developers have focused specifically on this issue and designed a host of different M8 and M12 sensor-actuator cables so you are bound to find the solution you need for your application.

Is there something you have not managed to find or you feel needs explanation? Talk to us!

General ordering data

| | |
|------------|---|
| Version | Sensor/actuator line, One end without connector, M12, Number of poles : 12, 1 m, Socket, angled, Shielded: No, LED: No, Sheath material: PUR, Halogen: No |
| Order No. | 1898240100 |
| Type | SAIL-M12BW-12-1.0U |
| GTIN (EAN) | 4050118591743 |
| Qty. | 1 pc(s). |

Creation date June 13, 2025 2:23:04 AM CEST

Catalogue status 07.06.2025 / We reserve the right to make technical changes.

SAIL-M12BW-12-1.0U

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Net weight 31 g

Technical specifications for cable

| | | | |
|--------------------------------------|-----------------------|--|--|
| Acceleration | 5 m/s ² | Bending cycles | 1 mill. |
| Bending radius, min., moving | 10 x cable diameter | Bending radius, min., stationary | 5 x cable diameter |
| Cable length | | Colour coding | yellow, pink, grey / pink, green, white, blue, violet, brown, red, grey, red / blue, black |
| | 1 m | Core cross-section | 0.14 mm ² |
| Configurable cable length | No | Halogen | No |
| Core in accordance with UL AWM style | 10493 (80 °C / 300 V) | Irradiation crosslinked | No |
| Insulation | PP | Outer cladding in accordance with UL AWM style | 20549 (80 °C / 300 V) |
| Number of poles | 12 | Resistant to welding beads | No |
| Outside diameter | 5.6 mm ± 0.2 mm | Sheathing colour | black |
| Sheath material | PUR | Speed | 5 m/s |
| Shielded | No | Temperature range, moving | -25...80 °C |
| Suitable for cable carriers | Yes | Torsion resistance | 180 °/m |
| Temperature range, stationary | -40...80 °C | | |
| Welding spark resistance | No | | |

General technical data

| | | | |
|------------------------------|-------------------|------------------------|-----------------------------------|
| AF size | 13 mm | Coding | A-coded |
| Connection thread | M12 | Contact surface | Gold-plated |
| Housing main material | PUR | Insulation strength | 10 ⁸ Ω |
| LED | No | Plugging cycles | ≥ 100 |
| Pollution severity | | Protection degree | IP67, when screwed in, IP65, IP66 |
| Rated current | 1.5 A | Rated voltage | 30 V |
| Temperature range of housing | -40 ... +85 °C | Threaded ring material | Brass, nickel-plated |
| Tightening torque | M12: 0.8 - 1.2 Nm | Version | Socket, angled |
| jumpered | No | | |

Electrical properties

| | | | |
|---------------------|-------------------|---------------|--------------------------------|
| Insulation strength | 10 ⁸ Ω | Rated current | 2 A (8-pole) / 1.5 A (12-pole) |
| Rated voltage | 30 V | | |

General standards

Certificate no. (cULus) E307231

Plug, left

Plug left M12, A-coded, IP67, female contact, angled 90°, Plastic, unshielded

Plug, right

Plug right free conductor end

Creation date June 13, 2025 2:23:04 AM CEST

Catalogue status 07.06.2025 / We reserve the right to make technical changes.

SAIL-M12BW-12-1.0U**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Classifications**

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC001855 | ETIM 7.0 | EC001855 |
| ETIM 8.0 | EC001855 | ETIM 9.0 | EC001855 |
| ETIM 10.0 | EC001855 | ECLASS 9.0 | 27-06-03-11 |
| ECLASS 9.1 | 27-06-03-11 | ECLASS 10.0 | 27-06-03-11 |
| ECLASS 11.0 | 27-06-03-11 | ECLASS 12.0 | 27-06-03-11 |
| ECLASS 13.0 | 27-06-03-11 | ECLASS 14.0 | 27-06-03-11 |
| ECLASS 15.0 | 27-06-03-11 | | |

Environmental Product Compliance

| | |
|------------------------|--------------------------------------|
| RoHS Compliance Status | Compliant |
| REACH SVHC | Lead 7439-92-1 |
| SCIP | e8d8af70-4c85-4483-bc8c-9bc5b598e2a9 |

Approvals

Approvals



| | |
|-------------------------|---|
| Approvals MAMID | https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319228/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319260/-T1z1mm-S800/ |
| ROHS | Conform |
| UL File Number Search | UL Website |
| Certificate no. (cULus) | E307231 |

Downloads

| | |
|------------------|--|
| Engineering Data | CAD data – STEP |
| Catalogues | Catalogues in PDF-format |

Data sheet


SAIL-M12BW-12-1.0U

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com


Drawings

Dimensioned drawing

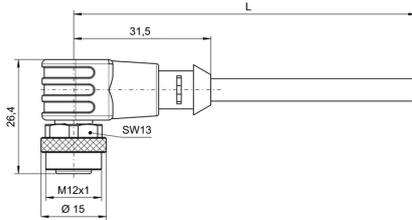

Pole scheme

Wiring diagram

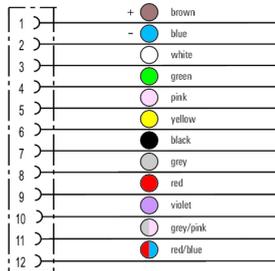

Socket

The ideal tool: Screwty® with torque function



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F