




PoE Signal Path Transformer ^{60W/120W} signal path

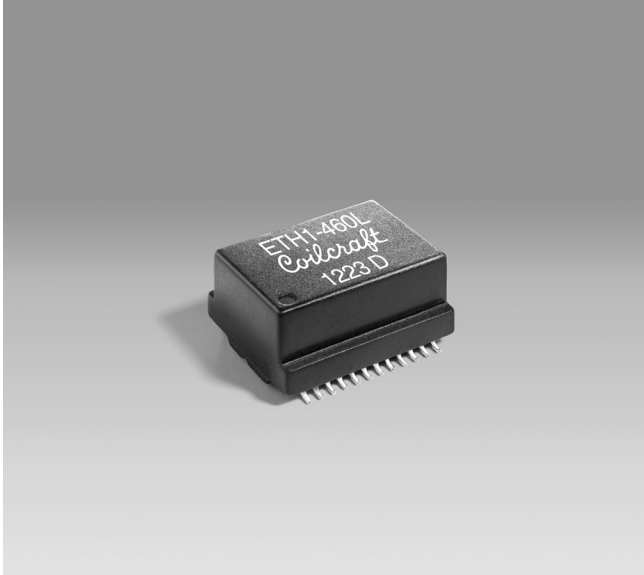

Core material Ferrite

Terminations RoHS compliant tin-silver-copper over tin over nickel over phos bronze

Weight 3.6 g

Ambient temperature -40°C to +85°C

Storage temperature Component: -40°C to +85°C.

Tape and reel packaging: -40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF) 60 per billion hours / 16,666,667 hours, calculated per Telcordia SR-332

Packaging 250/13" reel; Plastic tape: 32 mm wide, 0.5 mm thick, 24 mm pocket spacing, 10.6 mm pocket depth

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).

The **ETH1-460L**₁ is developed to meet the IEEE 802.3at-2009 and IEEE 802.3bt Type 4 standard for PoE+ and PoE++ applications. This module is designed for 4-pair cabling plants at 60 / 120 Watts. It exceeds the return loss requirements of Gbit Ethernet.

This single component solution may be used in place of two ETH1-230 parts, saving valuable board space.


It has a minimum open-circuit inductance of 350 μ H at an offset current of 35 mA at 25°C ambient temperature, and can handle 22.5 mA minimum dc offset at 85°C. Typical temperature rise from 25°C ambient is 7°C with 800 mA and 10°C with 1000 mA dc current applied to one center tap of each isolation transformer. Winding to winding isolation is 1500 Vrms. Ambient temperature range: -40°C to +85°C with 1 A current.

1. When ordering, please specify **packaging** code:

ETH1-460LD

Packaging: D = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (250 parts per full reel).


B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter D instead.

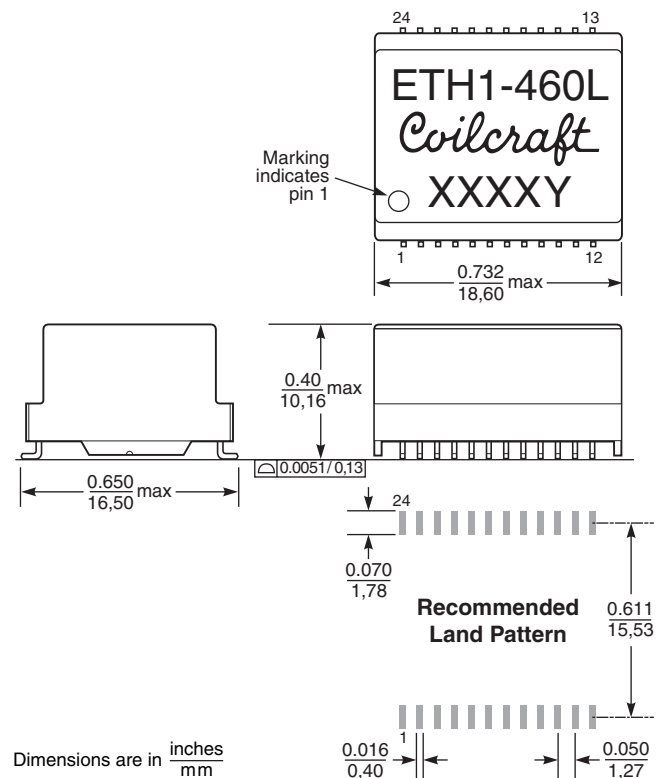




“PoE Plus” Magnetics – ETH1-460

Insertion Loss

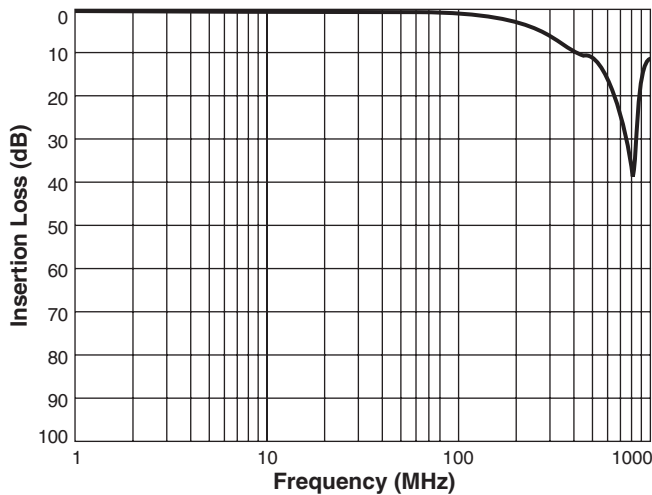



802.3af specification:
1.0 min dB from 0.1 MHz to 100 MHz
1.2 min dB at 125 MHz

Return Loss

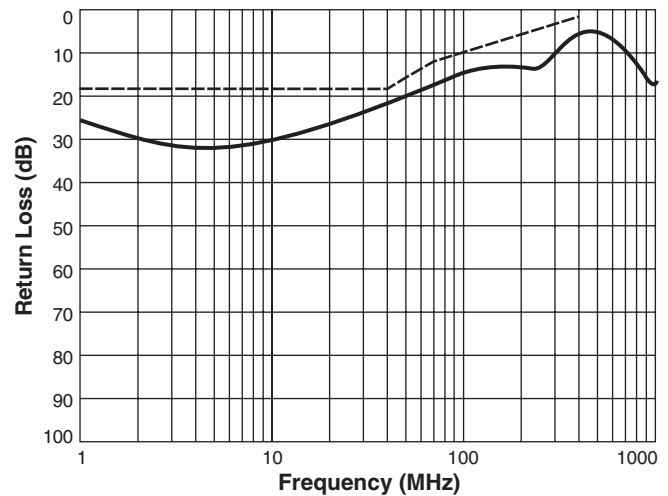

802.3af specification:
18 dB min from 1 MHz to 40 MHz
16 dB min at 50 MHz
12 dB min at 80 MHz
10 dB min at 100 MHz

L vs Offset Current

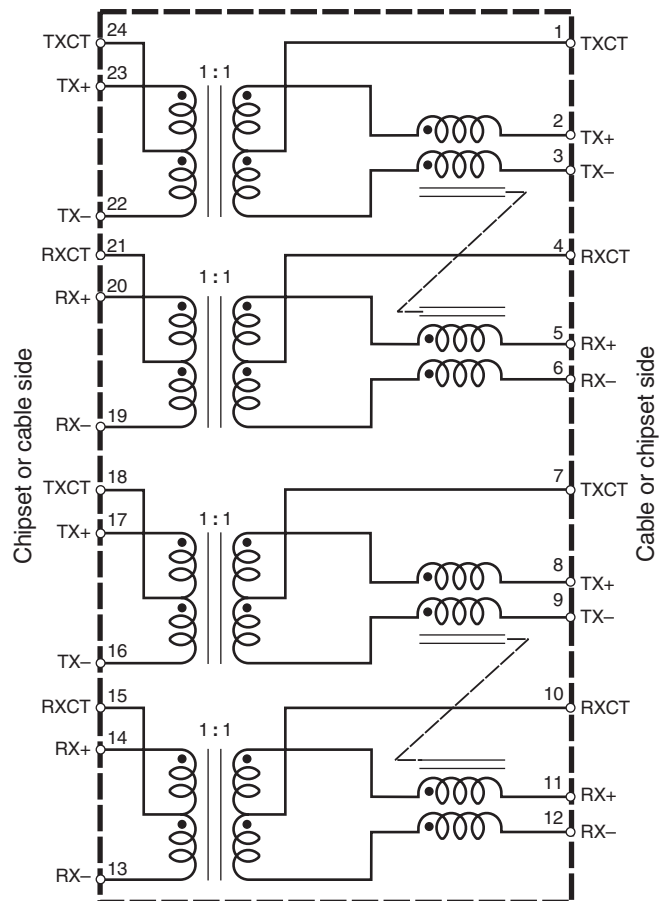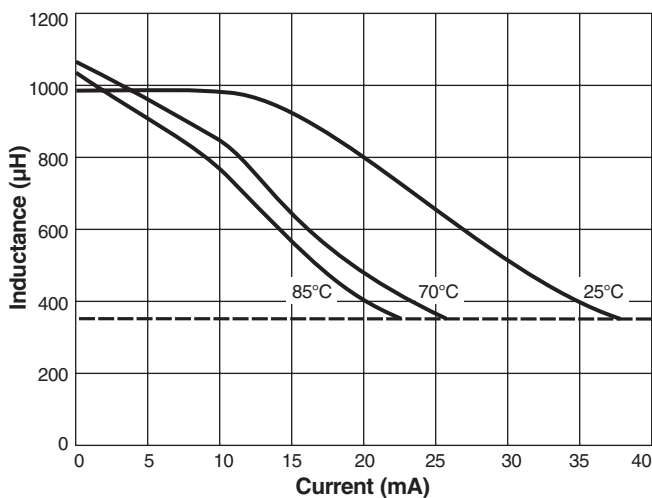

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Coilcraft:](#)

[ETH1-460LD](#) [ETH1-460LB](#)